

# Edimax IC-7000 Pan/Tilt IP Camera (Audio & Night Vision)


## Firmware Upgrade For Windows Vista

**Firmware Version: IC-7000\_V3.3\_F2.13**

**Release Note: To enable Audio Recording function in the Internet Explorer**


## **Step 1: Perform The Firmware Upgrade**

1. Download the firmware file (IC-7000\_V3.3\_F2.13.bin) from Edimax website. Save and unzip the IC-7000\_V3.3\_F2.13.bin file to your computer desktop.
2. Open the Internet Explorer, at the address bar, type the IP address of your IC-7000 and press Enter. (eg: 192.168.2.50)


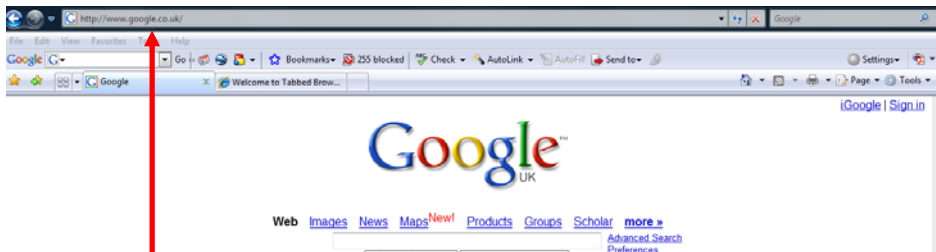


Type the IP address of your IC-7000.

3. Login to the IC-7000. Default User name is admin (all lowercase), Password is 1234. Click OK.

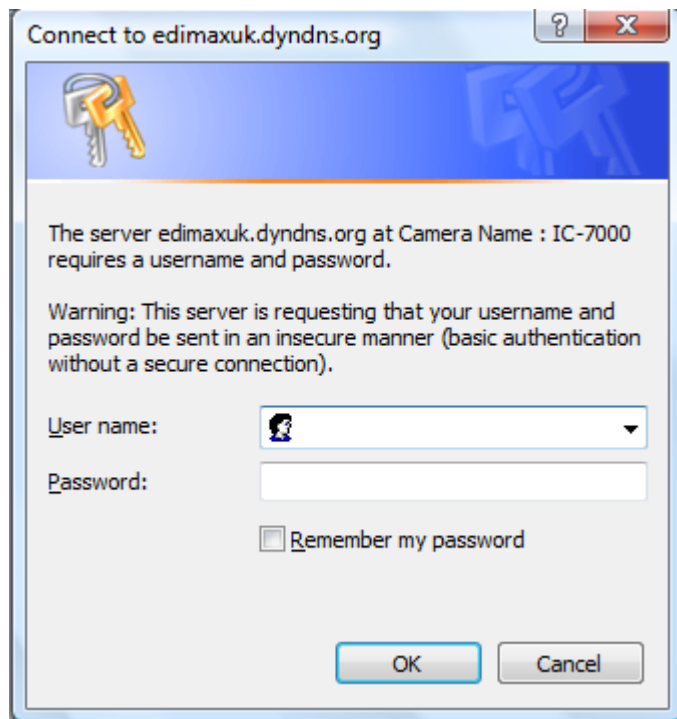


- Click on **Update**. Then, click **Browse** to select the firmware file (IC-7000\_V3.3\_F2.13.bin). Then click **Submit**.

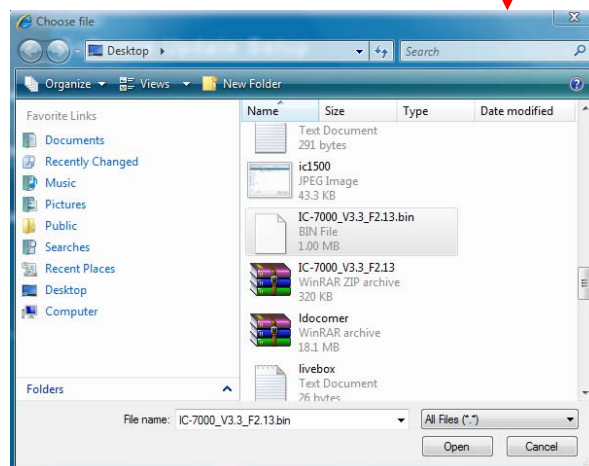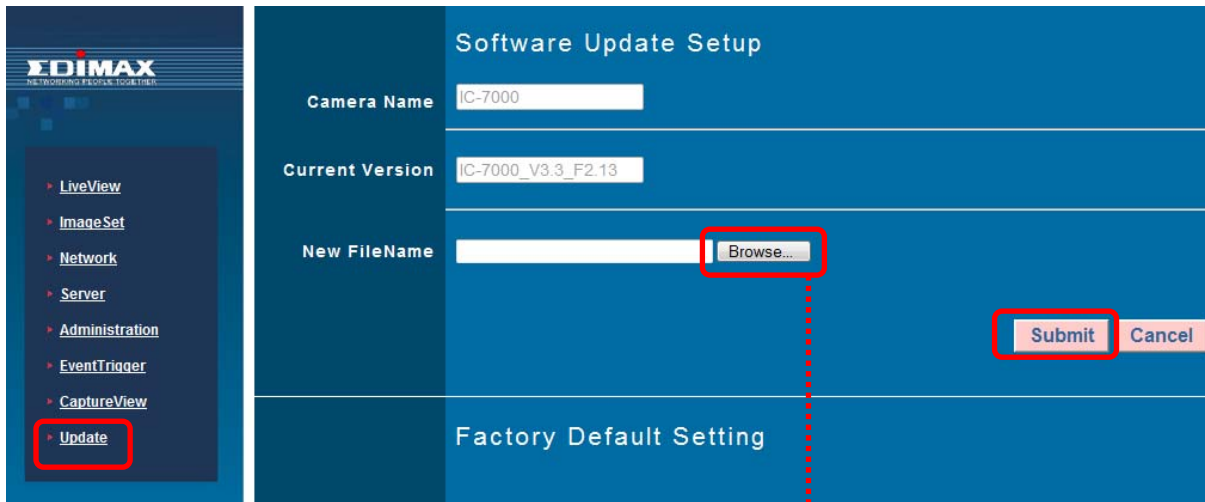


- Please wait until the firmware upgrade is completed.
- Then, reset the IC-7000 to factory default to allow the new firmware to take effect. To reset, press and hold the Reset button for 20 seconds with power on. (Please note that all current settings will be lost).
- After the reset, please setup the IC-7000 to your network again. (Configure the IP address, etc)

## Step 2: Configure The Internet Explorer


8. Open the Internet Explorer, click on **Tools>Manage Add-ons>Enable or Disable Add-ons**.

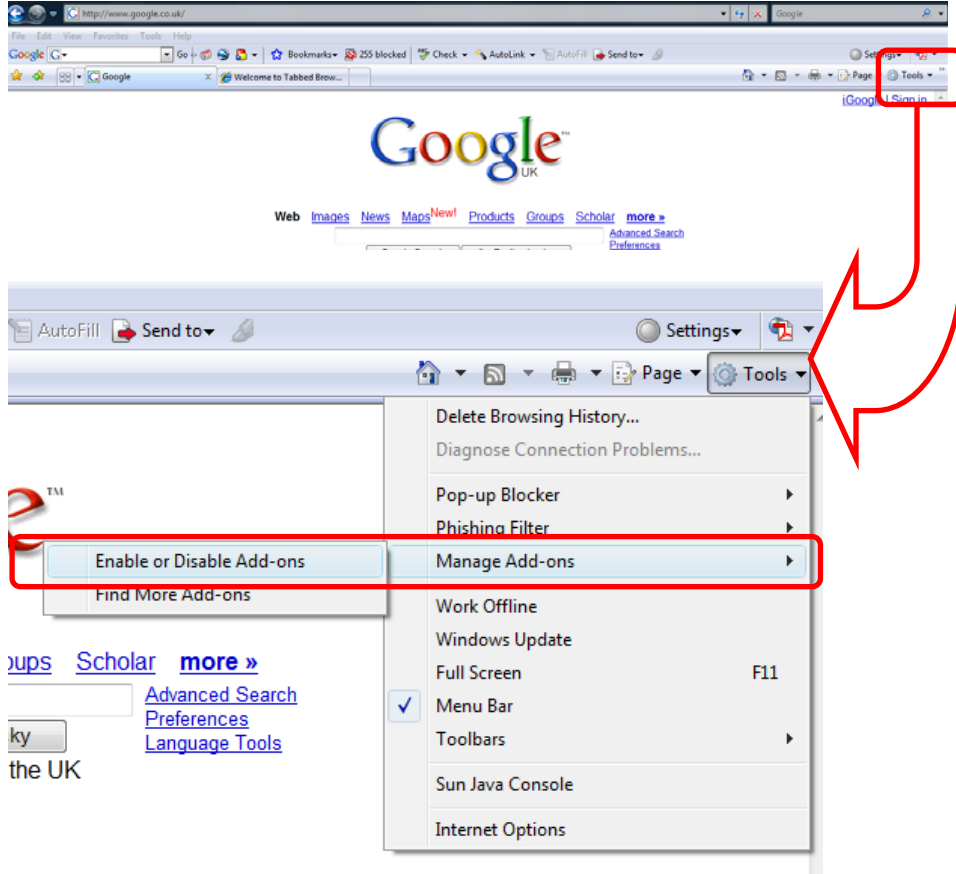


9. Select **Downloaded ActiveX Controls (32-bit)**.

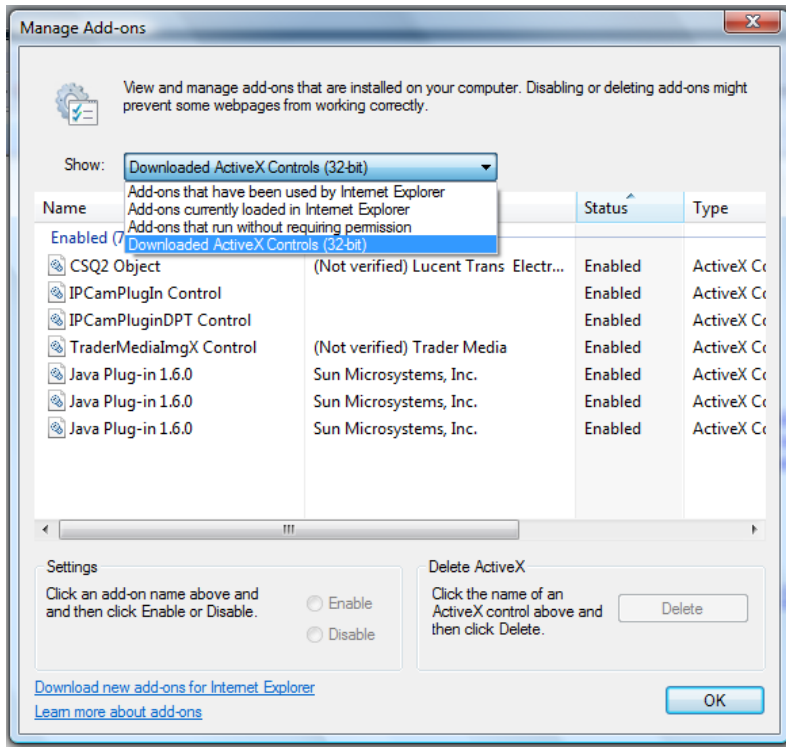

10. Select **CSQ2 Object** and then click **Delete** button. The CSQ2 Object will be removed from the list. Then, click **OK** button to close the Manage Add-ons.

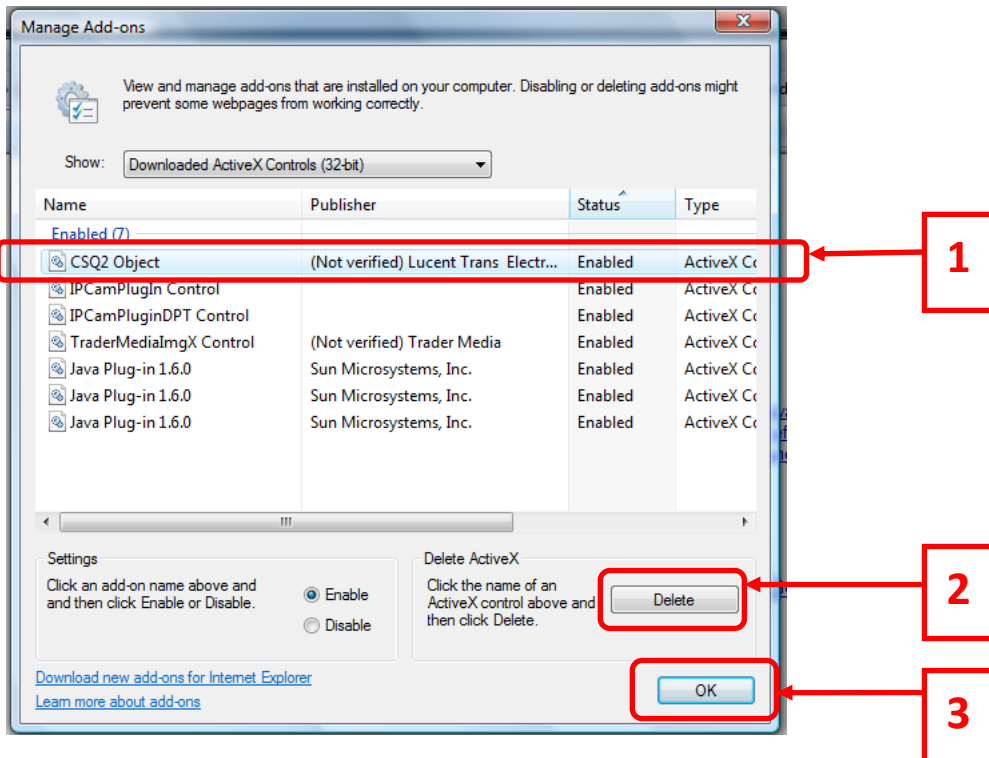

11. Click on **Tools >Internet Options>Click on Security tab. Click on Trusted Sites.**

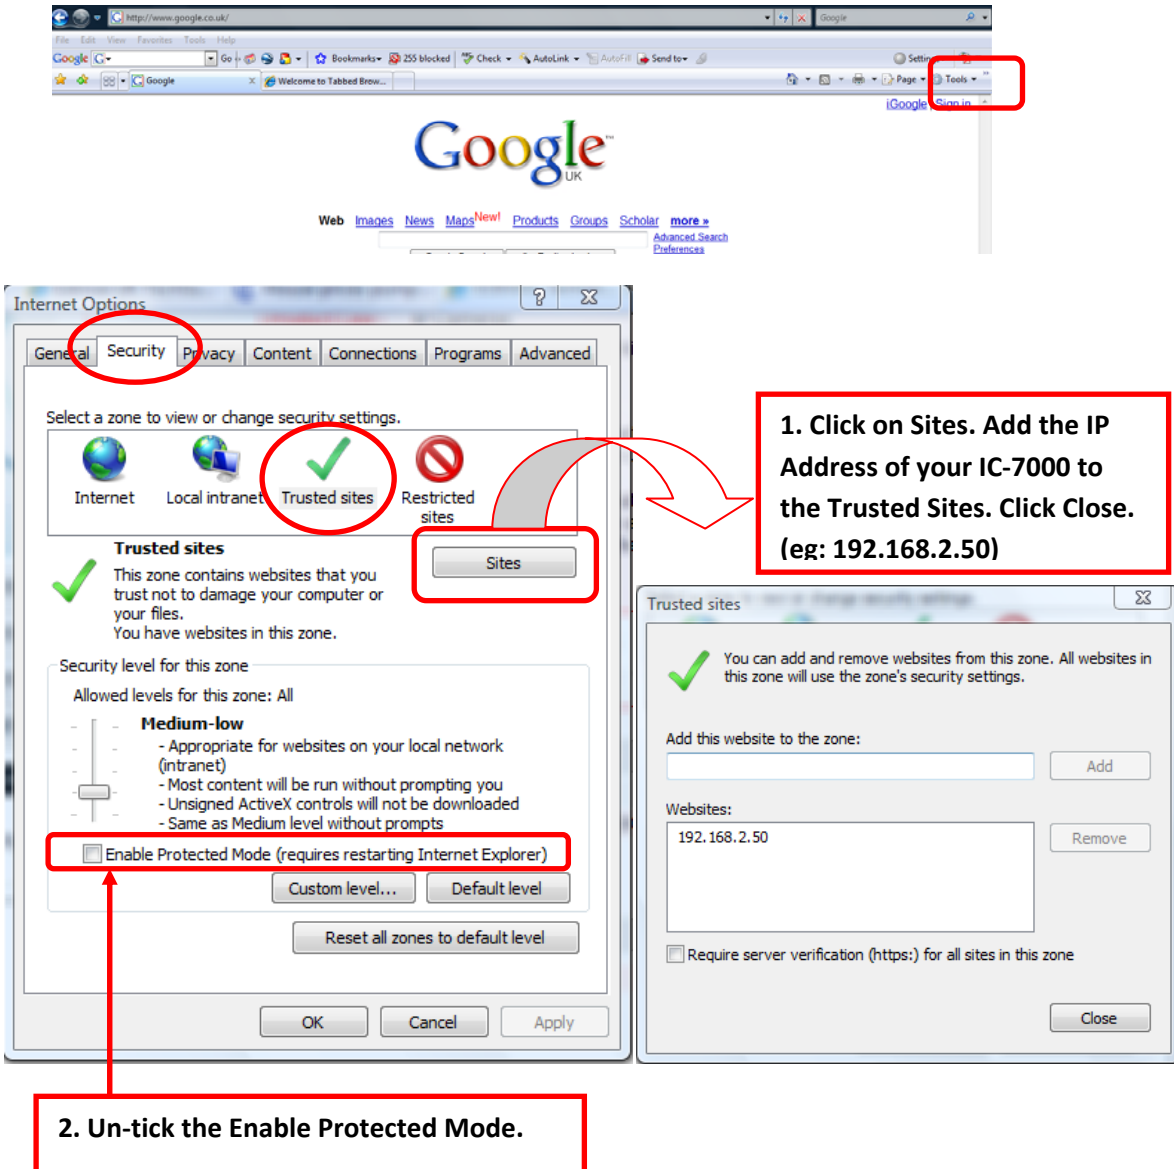

**1. Click on Sites. Add the IP Address of your IC-7000 to the Trusted Sites. Click Close. (eg: 192.168.2.50)**


**2. Un-tick the Enable Protected Mode.**

12. Click OK to close the Internet Options.


13. Close the Internet Explorer.

### **Step 3: Audio Recording Using the Internet Explorer**

14. Open the Internet Explorer, at the address bar, type the IP address of your IC-7000 and press Enter.

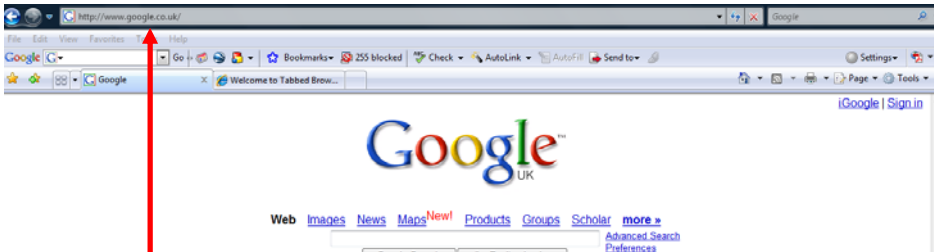


Type the IP address of your IC-7000.

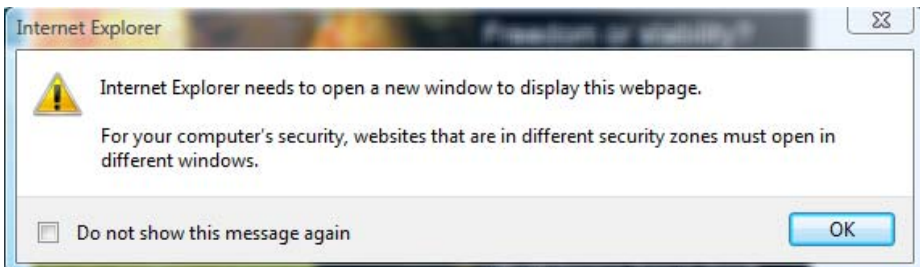


Click OK.



15. Login to the IC-7000. Default User name is admin (all lowercase), Password is 1234. Click OK.

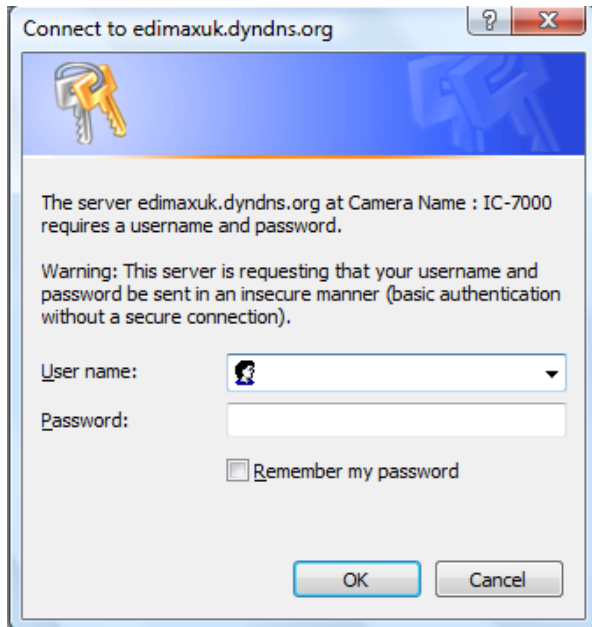

16. Click OK.

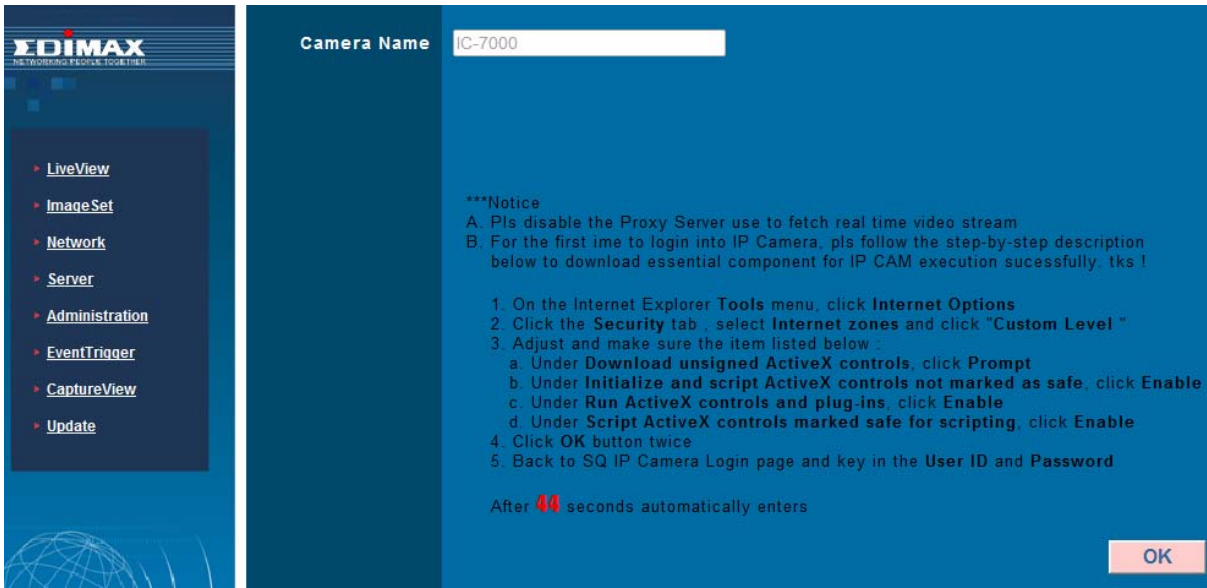

17. Click Install to install the IC-7000 Software/ActiveX.

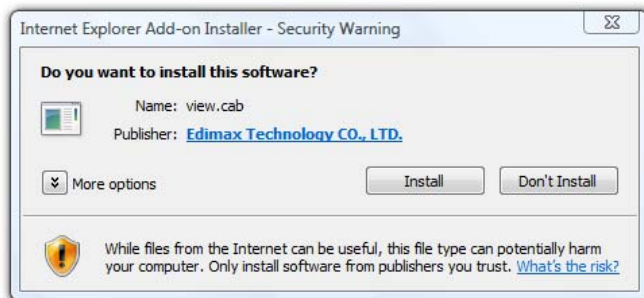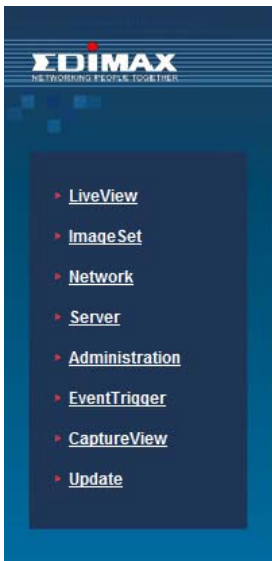

18. The firmware upgrade is completed. The Audio Recording function is now working in Windows Vista.

