

Edimax AR-7265WnA Wireless 11n ADSL 2+ Modem Router

Quick Installation Guide

1. Hardware Setup

Step 1. Connect the ADSL line

Connect the RJ-11 (the telephone cable supplied) from the telephone socket to the WAN port of the router

Step 2. Connect the router to your PC

Connect the router to your PC with an ethernet cable to one of the LAN port of the router.

Step 3. Connect the power adapter to the router

Connect the power adapter to the power jack on the rear panel of router.


Step 4. Check ADSL light status

Please check on the ADSL Led on the front panel of the router. The router will detect the ADSL-capable telephone line. If the ADSL light is on solid, your broadband is active. However, if the light is flashing, please call your internet service provider to confirm your broadband status.

Note: Please use the power adapter provided with the router, do NOT use any other power adapter from other sources.

2. Router Configuration

To configure the router to the internet, open Internet Explorer, type **http://192.168.2.1'** into the address bar and press Enter.

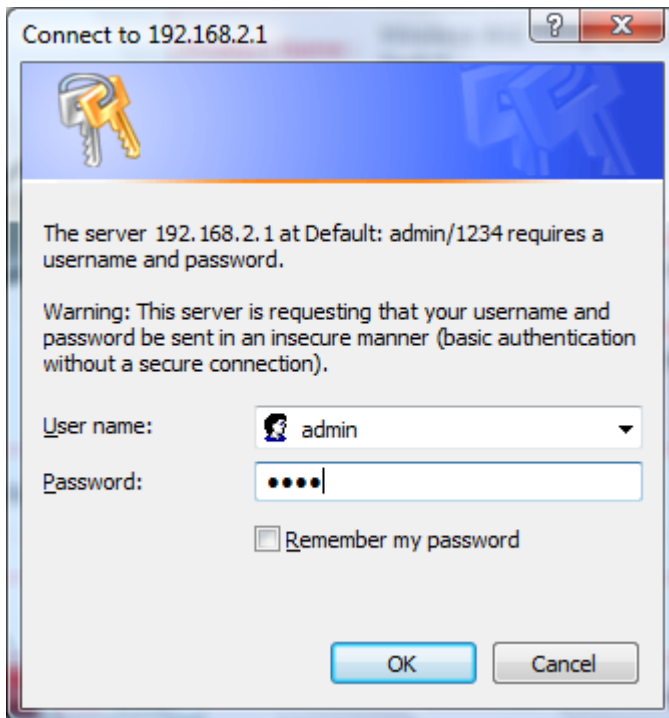

At the User name prompt, type '**admin**', Password prompt, type '**1234**'. Click '**OK**'.

Quick Start **Quick Start** Interface Setup Advanced Setup Access Management Maintenance Status Help

Quick Start

This ADSL Router is ideal for home networking and small business networking. The 'Quick Start' wizard will guide you to configure the ADSL router to connect to your ISP (Internet Service Provider). The router's easy Quick Start will allow you to have Internet access within minutes. Please follow the 'Quick Start' wizard step by step to configure the ADSL Router.

RUN WIZARD

Quick Start

The Wizard will guide you through these four quick steps. Begin by clicking on **NEXT**.

- Step 1. Set your new password
- Step 2. Choose your time zone
- Step 3. Set your Internet connection
- Step 4. Re-start your ADSL router

NEXT EXIT

Click Next.

Step 1 - Setup your new administrator's password. If you do not wish to change the password, type the default password '1234'. Click Next.

The screenshot shows the EDIMAX logo at the top left. Below it, the title "Quick Start - Password" is displayed. A paragraph of text reads: "You may change the **admin** account password by entering in a new password. Click **NEXT** to continue." Below this text are two input fields: "New Password:" and "Confirmed Password:", both containing five dots. At the bottom right, there is a red bar containing three buttons: "BACK", "NEXT", and "EXIT".

Step 2 - Setup your time zone, simply click on the drop down box to choose the location you are in. Choose GMT – London. Click Next.

The screenshot shows the EDIMAX logo at the top left. Below it, the title "Quick Start - Time Zone" is displayed. A paragraph of text reads: "Select the appropriate time zone for your location and click **NEXT** to continue." Below this text is a dropdown menu with the text "(GMT+08:00) Beijing, Hong Kong, Perth, Singapore, Taipei" and a downward arrow. At the bottom right, there is a red bar containing three buttons: "BACK", "NEXT", and "EXIT".

Step 3 – Setup Internet Connection Type, choose PPPoE/PPPoA. Click Next.

EDIMAX
NETWORKING PEOPLE TOGETHER

Quick Start - ISP Connection Type

Select the internet connection type to connect to your ISP. Click **NEXT** to continue.

- Dynamic IP Address Choose this option to obtain a IP address automatically from your ISP.
- Static IP Address Choose this option to set static IP information provided to you by your ISP.
- PPPoE/PPPoA Choose this option if your ISP uses PPPoE/PPPoA. (For most DSL users)
- Bridge Mode Choose this option if your ISP uses Bridge Mode.

BACK NEXT EXIT

Step 4 - Enter the connection information provided by your Internet Service Provider (ISP).

- The username is provided by your ISP. It is similar to an email address, eg: username@isp.co.uk.
- Please check if you have cap lock on when you enter your password.
- VPI = 0
- VCI = 38
- Connection Type = PPPoA VC-Mux.

If you do not have the information, please contact your ISP.

EDIMAX
NETWORKING PEOPLE TOGETHER

Quick Start - PPPoE/PPPoA

Enter the PPPoE/PPPoA information provided to you by your ISP. Click **NEXT** to continue.

Username:

Password:

VPI: (0~255)

VCI: (1~65535)

Connection Type: ▼

Click Next to save the settings. When it's done, click Close.


EDIMAX
NETWORKING PEOPLE TOGETHER

Quick Start Completed !!

Saved Changes.

Check the Internet Connection.

The internet will be connected and ready. To check the status, click on Maintenance -> Diagnostics:

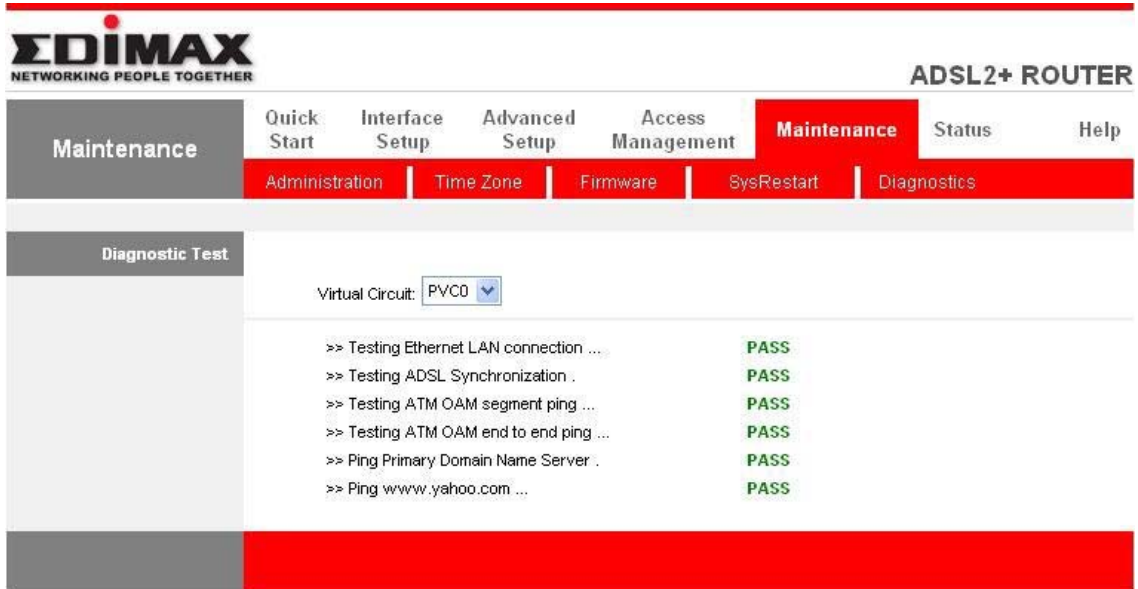

The router will run a test. If all PASS, you are connected to the internet. Close Edimax setup page and open the internet explorer to access to the internet.

If some are Fail, please check the following:

If ping Domain Name Server is Skipped and ping www.yahoo.com is Fail, then please check your ISP's username and password. This test result indicates that your username or password is invalid.